

 **GOLDSIONE 青岛金仕达**
GOLDSIONE — PVC&Rubber Hose 软管行业专家



青岛金仕达机械设备有限公司
GOLDSIONE GROUP LIMITED

公司简介 | COMPANY PROFILE

青岛金仕达机械设备有限公司专业致力于PVC塑料软管制品及胶管制品的研发生产与销售，包括塑料机械设备的制造与销售。公司成立于2001年，公司在国内设立了塑料制品，橡胶制品，以及塑料机械的加工工厂。

公司技术力量雄厚，有独立的研发创新能力，公司产品通过了质量、环境和职业健康安全三体系认证，用于食品行业的产品，依照美国食品药品监督管理局（FDA）规则，由瑞士通用公证行（SGS）检验，符合与食品接触的行业规定。

产品出口到中东，亚洲，欧洲等超过35个国家和地区，公司有专门的质量控制体系，从原料开始到生产成品全程监测，我们有信心成为你可靠的合作伙伴。

Goldsione Group., Ltd is specialized in producing pvc and rubber hose. It was founded in 2001, As a professional manufacturer and exporter of all kinds of pvc hose in the world, Goldsione Group., LTD has invested in two fields in China, including pvc hose ,rubber hose and plastic extruder machinery.

Furthermore, we guarantee timely delivery and better quality products at low cost, excellent and satisfied service to our customers. Our company have passed by ISO, FDA,SGS standards, and can thereby ensure quality and reliability for every customer. Currently our products are being exported to Asia, Middle East,African, Europe, more than 35 countries. We are confident of being able to meet all buyers' requirements.

Please contact us if you are looking for a trust worthy source of said products. We are looking forward to your sincere cooperation and participation.



1 PVC LAY FLAT HOSE


APPLICATIONS:

- 1) Agriculture irrigation and forestry sprinkler irrigation 1" to 12", the pressure range W. P 2bar-10bar , B. P 6bar-30bar .
- 2) Construction project, industrial and mining enterprise .

PRODUCT FEATURES:



- 1) Choosing high-strength dacron line, high quality PVC raw material.
- 2) One-step molding product, lining and plastic coated process once complete and more uniform distribution of raw materials, no crystal point, without air hole, inside and outside the wall smooth.
- 3) Acid corrosion resistance, high working pressure, anti-aging, non-toxic, extension ability.

WORKING TEMPERATURE: -10℃-65℃□

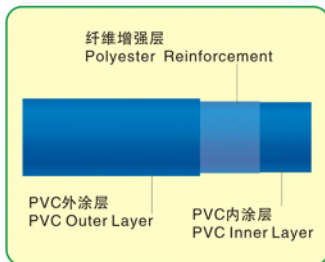

The standard size of PVC Lay Flat Hose

Article No.	Measurement	Inside Diameter mm	Work pressure	Burst pressure	Fixed length	
	Inch		Bar	Bar	Mtr	
PLFT-1	1"	25 ± 1.0	2	6	100	
PLFT-2	1"	25 ± 1.0	4	12	100	
PLFT-3	1"	25 ± 1.0	8	24	100	
PLFT-4	1-1/4"	32 ± 1.0	4	12	100	
PLFT-5	1-1/4"	32 ± 1.0	8	24	100	
PLFT-6	1-1/2"	38 ± 1.0	4	12	100	
PLFT-7	1-1/2"	38 ± 1.0	8	24	100	
PLFT-8	2"	50 ± 1.0	4	12	100	
PLFT-9	2"	50 ± 1.0	8	24	100	
PLFT-10	2-1/2"	64 ± 1.0	4	12	100	
PLFT-11	2-1/2"	64 ± 1.0	8	24	100	
PLFT-12	3"	75 ± 1.0	4	12	100	
PLFT-13	3"	75 ± 1.0	8	24	100	
PLFT-14	3-1/2"	90 ± 1.0	4	12	100	
PLFT-15	3-1/2"	90 ± 1.0	8	24	100	
PLFT-16	4"	102 ± 1.0	4	12	50/100	
PLFT-17	4"	102 ± 1.0	8	24	50/100	
PLFT-18	5"	127 ± 1.0	4	12	50/100	
PLFT-19	6"	152 ± 1.0	2	6	50	
PLFT-20	6"	152 ± 1.0	4	12	50	
PLFT-21	6"	152 ± 1.0	6	18	50	
PLFT-22	8"	203 ± 1.0	2	6	50	
PLFT-23	8"	203 ± 1.0	4	12	50	

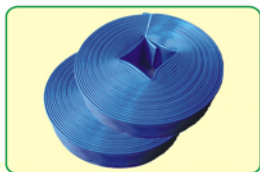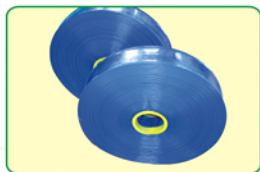

2 PVC FIBER STRENGTHEN SOFT HOSE



APPLICATIONS:

- 1) The fiber hose is used for conveying water, oil, gas under normal working condition in the factory.
- 2) Can be used in farm, ship, building and family.

CHARACTERISTICS:

The hose is flexible, transparent, durable, non-toxic, without odor, anti-erosion and adaptable to high pressure condition. May adding colorful symbol lines on the surface of hose.

WORKING TEMPERATURE: -10℃-65℃

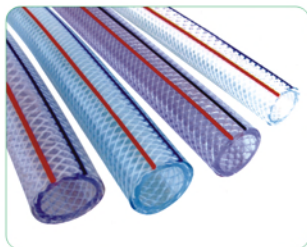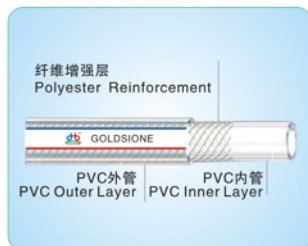

The standard size of PVC Fiber Strengthen Soft Hose

Article No.	Measurement		Diameter		Work pressure		Burst pressure	Fixed length	Weight
	Inch	I.D mm	O.D mm	Bar	Bar	Mtr	Kg/Mtr		
PFSS-1	1/5	5	9	10	30	100	0.059		
PFSS-2	1/4	6	10	8	24	100	0.068		
PFSS-3		6	11	9	27	100	0.09		
PFSS-4		6	12	10	30	100	0.114		
PFSS-5	5/16	8	12	8	24	100	0.084		
PFSS-6		8	13	10	30	100	0.111		
PFSS-7		8	14	12	36	100	0.141		
PFSS-8	3/8	9	13	8	24	100	0.093		
PFSS-9		9	14	10	30	100	0.121		
PFSS-10		10	14	8	24	100	0.102		
PFSS-11		10	15	8	24	100	0.133		
PFSS-12		10	16	10	30	100	0.166		
PFSS-13		12	16	6	18	100	0.119		
PFSS-14	12	17	7	21	100	0.153			
PFSS-15	1/2	12	18	9	27	100	0.19		
PFSS-16		13	17	6	18	100	0.127		
PFSS-17		13	18	6	18	100	0.163		
PFSS-18		13	19	7	21	100	0.204		
PFSS-19	5/8	15	19	6	18	100	0.144		
PFSS-20		15	20	7	21	100	0.186		
PFSS-21		15	21	8	24	100	0.229		
PFSS-22		16	20	6	18	100	0.154		
PFSS-23		16	21	6	18	100	0.196		
PFSS-24		16	22	6	18	100	0.24		
PFSS-25	3/4	19	23	5	15	50/100	0.178		
PFSS-26		19	24	5	15	50/100	0.229		
PFSS-27		19	25	5	15	50/100	0.281		
PFSS-28		19	26	5	15	50/100	0.33		
PFSS-29		20	25	5	15	50/100	0.24		
PFSS-30		20	26	5	15	50/100	0.25		
PFSS-31	20	27	5	15	50/100	0.35			
PFSS-32	1	25	30	5	15	50	0.294		
PFSS-33		25	31	5	15	50	0.357		
PFSS-34		25	32	5	15	50	0.425		
PFSS-35	1-1/4	32	39	5	15	50	0.526		
PFSS-36		32	40	5	15	50	0.612		
PFSS-37		32	41	5	15	50	0.697		
PFSS-38	1-1/2	38	45	5	15	50	0.616		
PFSS-39		38	46	5	15	50	0.714		
PFSS-40		38	47	5	15	50	0.81		
PFSS-41	1-3/4	45	55	5	15	50	1.063		
PFSS-42	2	50	60	4	12	40	1.19		
PFSS-43		50	62	4	12	40	1.428		
PFSS-44		64	78	4	12	40	2.174		

3 PVC STEEL WIRE HOSE

DESCRIPTION:

Full fresh pvc material & spiral zinc-plated steel wire make the hose has good adaptability to hard weather conditions and minus pressure.



PVC Steel Wire Reinforced Hose has smooth bore, it is light, transparent, with small bending radius. Can be widely used in conveying water, oil & power.

CHARACTERISTICS:

- 1) Has three grade: Agriculture, Industry & Food.
- 2) Can add colorful symbol line on surface to make the hose beautiful.
- 3) The hose used for foodstuffs is made of special materials. It is non-toxic, light, without odor & transparent.
- 4) Can insert the copper wire into the hose to prevent electrostatic.

The standard size of PVC Steel Wire Hose

Article No.	Measurement	Diameter		Work pressure	Burst pressure	Fixed length	Weight
	Inch	I.D mm	O.D mm	Bar	Bar	Mtr	Kg/Mtr
PWS-1	3/4"	20	24.6±0.2	5	15	50	0.25
PWS-2		20	25.4±0.2	5	15	50	0.3
PWS-3	1"	25	29±0.2	5	15	50	0.25
PWS-4		25	29.4±0.2	5	15	50	0.3
PWS-5		25	31.6±0.2	5	15	50	0.4
PWS-6		25	31.8±0.2	5	15	50	0.5
PWS-7	1-1/4"	32	36.6±0.2	5	15	50	0.4
PWS-8		32	37±0.2	5	15	50	0.5
PWS-9		32	40.2±0.2	5	15	50	0.65
PWS-10	1-1/2"	38	42±0.2	4	12	50	0.4
PWS-11		38	42.8±0.2	4	12	50	0.5
PWS-12		38	44.6±0.2	4	12	50	0.7
PWS-13		38	46±0.2	4	12	50	0.9
PWS-14	1-3/4"	42	49.8±0.2	4	12	50	0.9
PWS-15		45	52.8±0.2	4	12	50	0.8
PWS-16		45	53±0.2	4	12	50	1
PWS-17		50	56±0.2	4	12	50	0.7
PWS-18	2"	50	56.4±0.2	4	12	50	0.8
PWS-19		50	56.8±0.2	4	12	50	0.9
PWS-20		50	57±0.2	4	12	50	1
PWS-21		50	58±0.2	4	12	50	1.1
PWS-22	2-1/2"	50	59.6±0.2	4	12	50	1.2
PWS-23		58	67±0.2	4	12	30	1.4
PWS-24		64	70±0.2	4	12	30	1.2
PWS-25		64	72.4±0.2	4	12	30	1.4
PWS-26	3"	64	73.5±0.2	4	12	30	1.6
PWS-27		64	74±0.2	4	12	30	1.8
PWS-28		75	81.8±0.2	4	12	30	1.4
PWS-29		75	82.4±0.2	4	12	30	1.6
PWS-30	4"	75	83.6±0.2	4	12	30	1.8
PWS-31		75	85±0.2	4	12	30	2
PWS-32		75	85.8±0.2	4	12	30	2.2
PWS-33		102	110±0.2	4	12	30	2.5
PWS-34	5"	102	110.8±0.2	4	12	30	2.7
PWS-35		102	112±0.2	4	12	30	3
PWS-36		102	114.2±0.2	4	12	30	3.5
PWS-37		102	114.6±0.2	4	12	30	4
PWS-38	6"	102	121.6±0.2	4	12	30	5
PWS-39		108	118±0.2	4	12	30	3.2
PWS-40		108	120±0.2	4	12	30	3.5
PWS-41		127	141±0.2	3	9	20	5
PWS-42	152	166±0.2	3	9	20	6.5	
PWS-43	8"	200	224±0.2	3	9	10	12

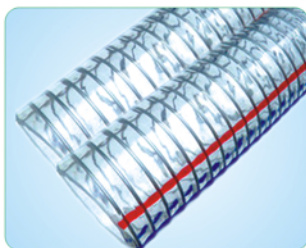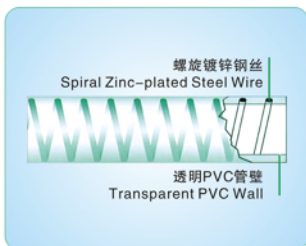

4 PVC GARDEN HOSE

DESCRIPTION:

Colorful UV resistant PVC Garden Hose using the latest pvc material with polyester reinforcement & the latest summer recipe, anti-UV in the sun, thermostability and RAD-Hard. Our garden hose is colorful, light, flexible, elastic & portable.


CHARACTERISTICS:

- 1) Using high quality PVC raw material with high strength polyester fiber reinforced in the inner layer.
- 2) Multiple layers available. Made from unique knitting technology crochet hose can be twisting-resistant.
- 3) Weather resistant cover, UV resistant & thermostability.
- 4) Matching adaptor or copper joints that can link to water head, also can match plastic spray gun etc.



The standard size of PVC Garden Hose

Article No.	Measurement Inch	Diameter		Work pressure Bar	Burst pressure Bar		Fixed length Mtr	Weight Kg/Mtr
		I.D mm	O.D mm		Bar	Bar		
PGH-1	1/4"	6	10	8	24	100	0.068	
PGH-2		6	11	8	24	100	0.009	
PGH-3	3/8"	10	14	8	24	100	0.102	
PGH-4		10	15	8	24	100	0.132	
PGH-5	1/2"	12	16	8	24	100	0.119	
PGH-6		13	18	8	24	100	0.165	
PGH-7	5/8"	16	21	7	21	50	0.196	
PGH-8	3/4"	19	24	5	15	50	0.228	
PGH-9		19	25	5	15	50	0.28	
PGH-10	1"	25	30	4	12	50	0.30	
PGH-11		25	31	4	12	50	0.356	

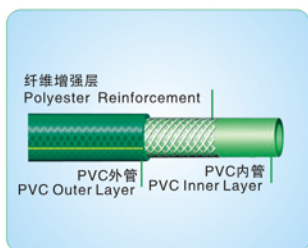

5 PVC TRANSPARENT SOFT HOSE


APPLICATIONS:

- 1) The products is used for conveying water, oil, gas under normal working condition.
- 2) Used in agriculture, industry, shipping industry, building trade and family.
- 3) Construction project, industrial and mining enterprise.

CHARACTERISTICS:


It is flexible, durable, non-toxic, without odor, and resistant to high pressure and erosion.

WORKING TEMPERATURE: -10℃-65℃

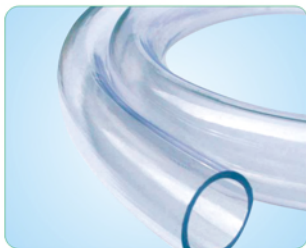

The standard size of PVC Transparent Soft Hose

Article No.	Measurement	Diameter		Work pressure		Burst pressure	Fixed length	Weight
		Inch	I.D mm	O.D mm	Bar			
PTSH-1	1/4"	6	8	5	15	100	0.0297	
PTSH-2	5/16"	8	10	5	15	100	0.038	
PTSH-3	3/8"	10	12	5	15	100	0.047	
PTSH-4	1/2"	12	15	3	9	50	0.086	
PTSH-5	5/8"	15	18	3	9	50	0.105	
PTSH-6	3/4"	19	22	3	9	50	0.13	
PTSH-7	1"	25	30	3	9	50	0.291	
PTSH-8	1-1/4"	32	38	3	9	40	0.445	
PTSH-9	1-1/2"	38	44	3	9	40	0.521	
PTSH-10	2"	50	58	3	9	40	0.916	

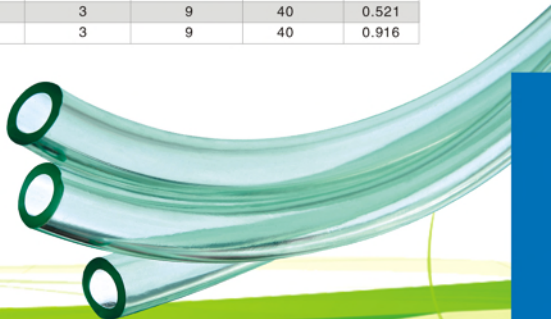

6 PVC AIR HOSE

CHARACTERISTICS:

- 1) Being made of tough PVC materials and high tensile polyester reinforcement, it is light, flexible, durable, anti-erosion, and explosion resistant.
- 2) Can make 5 layers pvc spray hose to promise the burst pressure be 180 bar.
- 3) Can add symbol line & wear resisting strip.

APPLICATIONS:

The hose is widely used in pneumatic tools, pneumatic washing apparatus, compressors, engine components, machine service and civil engineering equipments.



The standard size of PVC Air Hose

British Measurement (inch)	Metric Measurement		Length (M)	W.P. (MPa)	B.P. (MPa)	Weight (Kg/Roll)	Volume (m ³)
	I.D (mm)	O.D (mm)					
1/4	6	11	100	2.0	9.0	9.10	0.038
5/16	8.5	14	100	2.0	8.5	13.50	0.065
3/8	10	16	100	1.8	8.0	16.60	0.075
1/2	13	20	100	1.8	7.5	24.8	0.085
5/8	16	25	50	1.7	6	19.6	0.056
3/4	19	28	50	1.5	5.2	21.5	0.067
1	25	34	50	1.5	4.5	27.5	0.090

7 PVC SUCTION HOSE

CHARACTERISTICS:

- 1) It is flexible, durable, non-toxic, without odor, and resistant to high pressure and erosion.
- 2) PVC suction hose outside wall can be smooth or corrugated.
- 3) With special material, make the hose good weather resistance.


APPLICATIONS:

- 1) The products is used for conveying water, oil, gas under normal working condition.
- 2) Suitable for conveying powder, grain, water and oil, etc .
- 3) Widely used in construction project, industrial and mining enterprise.



The standard size of PVC Suction Hose

Article No.	Measurement		Diameter		Work pressure	Burst pressure	Fixed length
	Inch	I.D mm	O.D mm	Bar	Bar	Mtr	
PSH-1	5/8"	16	21	-1 ~ 7	21	50	
PSH-2	3/4"	19	25	-1 ~ 7	21	50	
PSH-3	1"	25	32	-1 ~ 7	21	50	
PSH-4	1-1/4"	32	40	-1 ~ 7	21	50	
PSH-5	1-1/2"	38	46	-1 ~ 6	18	50	
PSH-6	2"	51	60	-1 ~ 6	18	50	
PSH-7	2-1/2"	64	73	-1 ~ 5	15	20	
PSH-8	3"	76	86	-1 ~ 4	12	20	
PSH-9	4"	102	113	-1 ~ 4	12	20	
PSH-10	5"	127	139	-1 ~ 4	12	20	
PSH-11	6"	152	166	-1 ~ 4	12	20	

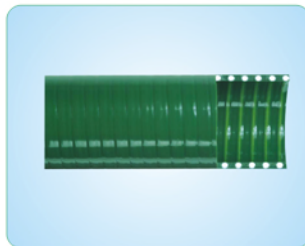


8 RUBBER SUCTION HOSE

DESCRIPTION:

The abrasion & aging resistant synthetic rubber making inner tube and cover, together with the high tensile fiber cotton yarn braids with 1 helix wire embedded reinforcement making the rubber suction hose wear-resisting, cold-resistant & resistant to high pressure.

CHARACTERISTICS:

- 1) Having smooth surface & wave surface 2 choices.
- 2) Oil & weather resistant, good abrasion character, resistant to high pressure.
- 3) Full fresh SBR material together with special nylon cord promise the high pressure resistant.
- 4) Can supply bauer coupling together.



The standard size of Rubber Suction Hose

I.D		Layers	OD (mm)	WP (Bar)	WEIGHT Kg/m	Fixed Length (m)
Inch	mm					
1	25	2	47	15	0.99	10
1 1/4	32	2	55	10	1.53	10
1 1/4	38	2	61	10	1.59	10
1 1/2	38	3	63	10	1.74	10
2	51	2	74	7	2.00	10
2	51	3	76	7	2.20	10
2 1/2	65	3	89	7	2.70	10
3	76	3	101	6	3.43	10
3	76	4	103	7	3.74	10
3 1/2	89	3	114	6	4.01	10
3 1/2	89	4	116	7	4.39	10
4	102	3	127	5	4.57	10
4	102	4	129	7	4.98	10
5	125	3	154	5	6.83	10
5	125	4	156	6	7.30	10
5	125	5	158	7	7.85	10
6	152	4	179	3	8.06	10
6	152	5	183	5	9.28	10
8	203	5	234	3	12.11	8
8	203	6	240	5	12.90	8
10	254	6	292	3	18.10	6
10	254	8	296	5	19.99	6

9 RUBBER AIR/WATER/SANDBLAST/HEATER/WELDING HOSE 橡胶空气管/水管/砂管/暖风管/双联管

TUBE: black antistatic abrasion resistant rubber/ EPDM/ SBR/ NBR

REINFORCEMENT: with or without reinforcement/ nylon cord layers according to different usage

COVER: black antistatic abrasion resistant rubber/ EPDM rubber

APPLICATIONS: for industrial cleaning, cutting, polishing, casting serving, heater hose, delivery water or air. Also can make welding hose for welding usage



管体: 耐磨橡胶/EPDM胶/SBR/NBR胶

加强层: 根据用途加线或者不加线

外层: 根据用途使用耐磨胶, EPDM胶, SBR 或NBR

用途: 可用于工业清洗, 电焊, 抛光, 输送暖风, 输送水或者气体, 也可做成双联管应用于气焊

尺寸 Measurement		尺寸 Measurement		编织层数 Weave Floor	工作压力 W.P	爆破压力 B.P	常规长度 fixed length
Inch	I.D mm	O.D mm	B		Mpa	Mpa	m
3/16"	5	12	1		1.5-2.0	4.5-6.0	100
1/4"	6	13	1		1.5-2.0	4.5-6.0	100
5/16"	8	15	1		1.5-2.0	4.5-6.0	100
3/8"	10	17	1		1.5-2.0	4.5-6.0	100
1/2"	13	21	2		1.5-2.0	4.5-6.0	100
5/8"	16	25	2		1.5-2.0	4.5-6.0	100
3/4"	19	29	2		1.5-2.0	4.5-6.0	50
1"	25	36	2		1.5-2.0	4.5-6.0	50
1-1/4"	32	42	2		1	3	30
1-1/2"	38	51	2		1	3	30
2"	51	65	2		1	3	30

10 DIN EN 853 1SN/ DIN EN 853 2SN/ DIN EN 856 4SP

高压钢丝编织液胶管1SN/ 2SN/ 4SP

Tube:oil resistant synthetic rubber

Reinforcement:one/two/four high tensile steel wire braided layer

Cover:abrasion and weather resistant synthetic rubber

Working temperature: -40° F to 212° F(-40℃ to100℃)






内径 Inside Diameter		增强层 Reforce Diameter		外径 Outside Diameter		工作压力 Working Pressure		爆破压力 Burst Pressure		弯曲半径 Min.Bend Radius		重量 Weight
inch	mm	inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	kg/m
3/16"	4.80	0.37	9.50	0.46	11.80	3625	250	14600	1000	3.54	900	0.18
1/4"	6.40	0.44	11.10	0.53	13.40	3250	225	13050	900	3.94	100	0.23
5/16"	7.90	0.50	12.70	0.60	15.00	3120	215	12320	850	4.50	115	0.27
3/8"	9.50	0.60	15.10	0.70	17.40	2610	180	10440	720	5.12	130	0.33
1/2"	12.70	0.72	18.30	0.81	20.60	2320	160	9280	640	7.09	180	0.41
5/8"	15.90	0.84	21.40	0.93	23.70	1885	130	7540	520	7.87	200	0.47
3/4"	19.00	1.00	25.40	1.09	27.70	1525	105	6000	420	9.45	240	0.61
1"	25.40	1.31	33.30	1.40	35.60	1275	88	5200	350	11.81	300	0.94
1-1/4"	31.80	1.60	40.50	1.70	43.50	1915	63	3600	250	16.54	420	1.20
1-1/2"	38.10	1.84	46.80	2.00	50.60	725	50	2900	200	19.69	500	1.60
2"	50.80	2.37	60.20	2.52	64.00	580	40	2320	160	24.80	630	2.20

结构: 胶管由内胶层和一层/两层/四层钢丝编织层, 以及外胶层组成

应用: 适用于输送液压油体如: 液压油、燃油、润滑油、乳化油等

工作温度: -40℃-100℃

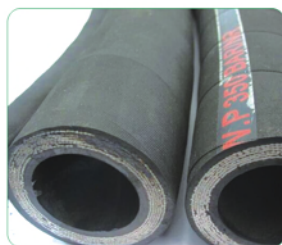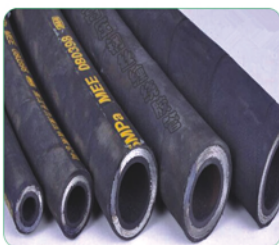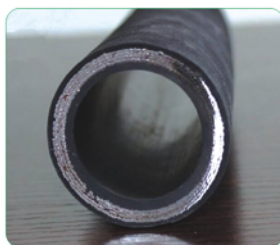

11 PLASTIC PLYWOOD


金仕达耐用塑面防水建筑模板

SPECIFICATIONS:

- 1) Size: 1220*2440mm
- 2) Thickness: 18mm 21mm
- 3) Core: Poplar
- 4) Glue: WBP, Phenol aldehyde resin, MR
- 5) Reinforcement: Whole piece poplar covered with rigid plastic PP and film each face, Edge banding, more waterproof
- 6) Surface: 0.5mm thickness hard-wearing and waterproof rigid plastic pp and film
- 7) Plywood Type: 9-15 Ply Boards
- 8) Moisture Content: Less than 8%

APPLICATIONS:

- 1) It is widely used in construction, concrete shuttering, concrete formwork etc.
- 2) One set of this kind of plywood is enough for a 30 storey's high-rise buildings.
- 3) Can be reused more than 30 times.
- 4) This plywood has been widely used by many well-known estate enterprises, such as Vanke, Country Garden Holdings, Wan Tai Group etc.



产品规格:

面皮: 防水耐磨环保硬质塑料PP, 四周封边设计
内芯胶水: 优质酚醛树脂胶(水煮不开胶), MR
内芯材质: 优质整料杨木
尺寸: 1220mmx2440mm
厚度: 18mm 21mm

突出特点:

- 1) 材质轻便, 可钉可锯, 减少配模时间, 提高施工效率。
- 2) 四周封边, 使用专业防水胶, 防水防潮效果更好。
- 3) 表面复合特殊材料, 免刷脱模剂, 极易脱模, 墙体成型光滑平整, 工程质量极佳。
- 4) 内芯压制前板皮全部烘干, 含水率低于8%。
- 5) 板皮全部整芯整料。
- 6) 压缩比10%以上。
- 7) 上胶方式采取层层上胶工艺, 每张板含胶量超过隔层上胶工艺20%。
- 8) 周转次数30次以上节约施工成本。




12 PVC LAY FLAT HOSE PRODUCTION LINE

PVC一步法水带生产线

FEATURES: The PVC Special High-Strength Layflat Hose Production line is a new self-developed production by digesting and absorbing the foreign advanced technology manufacturing once-shaped hoses by the special techniques of plasticizing the PVC materials squeezed through extruder, which uses polyester fiber as reinforcing material. The hoses produced by the line have the characteristics of good flexibility, high pressure resistance, corrosion resistance, aging resistance, light weight, no limitation in length, etc.

特点: PVC一步法水带生产线是我公司吸收消化国外先进技术而自行研制的新产品，它生产以涤纶纤维为增强材料，经特殊工艺和由挤出机塑化挤出PVC物料一次成型的软管。该生产线生产的软管具有柔韧性好、耐高压、抗腐蚀、耐老化、重量轻、无限长等优点。

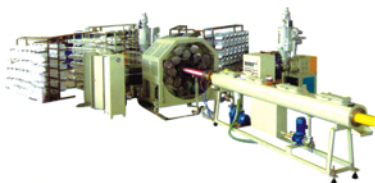

主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机功率 Motor Power	总功率 Whole Power	中心高 Center High	生产范围 Scope of Product
SJ-65	65	30	38CrMnAl	15	28	1100	φ25-φ75
SJ-90	90	30	38CrMnAl	37	52	1100	φ75-φ132
SJ-120	120	30	38CrMnAl	55	75	1100	φ102-φ200

13 PVC FIBER SOFT HOSE PRODUCTION LINE

PVC纤维增强管生产线

PRODUCT INTRODUCTION:

The line is suitable for the production of PVC fiber reinforced pipe. This kind of pipe is made of three layers structure. The inner and the outer layers will be made of PVC plastics and the middle layer is made of terylene fiber reinforced net. The pipe is suitable for the conveying of corrosive gas or liquid. It can be widely used in the fields of machinery, coal mine, oil, chemical plant ,agricultural irrigation, building, solar water heater, coal gas pot, etc.

After changing some parts or add some equipments, the line is suitable for the production of PVC screw thread colored pipe(shower pipe)with PET film inside. It has beautiful appearance and is used in solar water heater and so on.

产品介绍:

PVC纤维增强软管又称PVC网格管，俗称塑料蛇皮管，管材为三层结构，内外两层是PVC软质塑料，中间一层是涤纶纤维增强网，具有良好的力学性能和化学性能。适于有压或有腐蚀性的气体、液体的输送，广泛应用在机械、煤矿、石油、化工、农灌、建筑、民用（太阳能热水器、煤气罐）等领域。

本生产线更换部分配件，增加少许设备也可生产中间缠有PET膜的PVC螺纹纹型增强软管（凹凸淋浴管）。这种软管外观十分漂亮，广泛应用于太阳能热水器等领域。



主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机功率 Motor Power	总功率 Whole Power	中心高 Center High	生产范围 Scope of Product
SJ-45/55	45/55	30	38CrMnAl	7.5/11	35	1000	φ6-φ14
SJ-55/65	55/65	30	38CrMnAl	11/15	46	1000	φ16-φ38
SJ-75/90	75/90	30	38CrMnAl	18.5/37	80	1000	φ50-φ102

14 PVC STEEL WIRE HOSE PRODUCTION LINE


PVC钢丝管生产线

PRODUCT INTRODUCTION:

The line is used to produce PVC steel wire reinforced transparent pipe. The pipe wall is made of transparent PVC plastics. There is spiral wire in the pipe wall. This kind of pipe has the advantages of extrusion resistance, corrosion resistance, static electricity resistance, anti-high pressure and good running. It is suitable for the conveying high pressure or combustible gas and liquid, heavy suction and delivery of liquid sludge. It is mainly used in machinery industry, building, irrigation and vacuum pump, ect.

产品介绍:

本生产线适用于生产PVC钢丝增强软管。管壁为PVC透明软质塑料，其内为螺旋钢丝，具有耐挤压，耐腐蚀、抗静电、抗高压、流通性好等特点，适于有高压和易燃气体、液体的输送，以及液体杂质的重吸轻，主要用于机械、化工、建筑、农业灌溉和真空设备等。

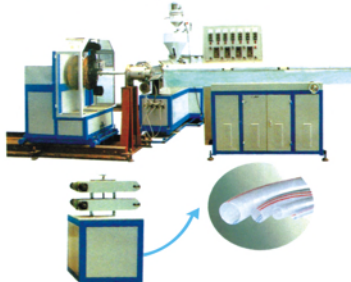

主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机电率 Motor Power	总功率 Whole Power	中心高 Center High	生产范围 Scope of Product
SJ-45	45	30	38CrMnAl	7.5	18	1100	φ12-φ20
SJ-65	65	30	38CrMnAl	15	27	1100	φ25-φ38
SJ-90	90	30	38CrMnAl	30	46	1100	φ50-φ75
SJ-100	100	30	38CrMnAl	37	56	1100	φ64-φ102
SJ-120	120	30	38CrMnAl	55	80	1100	φ75-φ150
SJ-150	150	30	38CrMnAl	75	108	1100	φ102-φ200

15 PVC GRAINING PRODUCTION LINE

PVC造粒机

FEATURES:The variable frequency speed control granulator, aluminum heater, single spiral structure, electronic temperature control instrument, has the stable operation, high output, and even granule-cutting etc. Characteristics. Is suitable for the plastic products manufacturer of hot cutting PVC materials.

特点:造粒机采用变频调速控制，铸铝加热器，单螺旋结构，电子温控仪表，具有运行稳定，产量高，切粒均匀等特点。适用于塑料制品厂家PVC原料的热切造粒。



主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机电率 Motor Power	总功率 Whole Power	中心高 Center High
SJ-90	90	16	38CrMnAl	18.5	30	800
SJ-150	150	10	38CrMnAl	45	70	1000



◎地址：山东省潍坊市昌乐县蓝宝石商务大厦A座908室

◎电话：0086-536-2181073

◎邮箱：sales@goldsione.com

◎Skype：goldsione

◎http://www.goldsione.com

Add: A908 Lanbao Business Mansion,
Changle county, Weifang city,
Shandong province, China

Tel: 0086-536-2181073

E-mail: sales@goldsione.com

Skype: goldsione

http://www.goldsione.com